


□ Features:

- Part No:0800HA-XX
- Poles: 02~20
- Material: Nylon 46 UL 94V-0
- Rated Voltage:30V AC, DC
- Rated Current:0.5A AC, DC
- Withstanding Voltage:200V AC/minute
- Contact Resistance:20MΩ(Max)
- Insulation Resistance:100MΩ(Min)
- Temperature Range:-25° ~+85° C

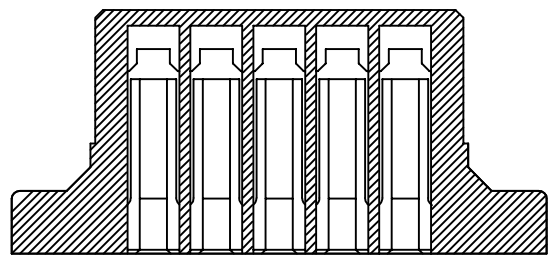

PART NO.	Dimensions			Pcs/Bag
	A	B	C	
02P	0.80	1.80	4.40	1000
03P	1.60	2.60	5.20	1000
04P	2.40	3.40	6.00	1000
05P	3.20	4.20	6.80	1000
06P	4.00	5.00	7.60	1000
07P	4.80	5.80	8.40	1000
08P	5.60	6.60	9.20	1000
09P	6.40	7.40	10.00	1000
10P	7.20	8.20	10.80	1000
11P	8.00	9.00	11.60	1000
12P	8.80	9.80	12.40	1000
13P	9.60	10.60	13.20	1000
14P	10.40	11.40	14.00	1000
15P	11.20	12.20	14.80	1000
16P	12.00	13.00	15.60	1000
17P	12.80	13.80	16.40	1000
18P	13.60	14.60	17.20	1000
19P	14.40	15.40	18.00	1000
20P	15.20	16.20	18.80	1000

东莞市翰皓精密电子有限公司

DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD

核准

单位

比例

材质

颜色

程文才

M M

1: 1

PA46

\*

审核

版次

图法

未标注公差:

马盛

A0



.0 ±0.20

绘图

日期

页码

.00 ±0.10

向丽

2016/09/19

1/1

.000 ±0.05

规格

0.8打线式单排带耳HSG

品名

0.80mm pitch wire to board connector

图号

HSG-077