
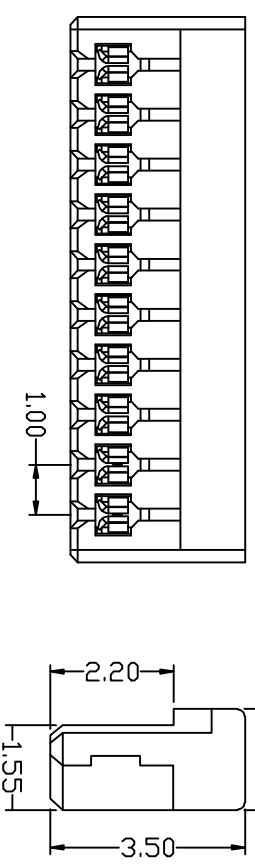


环保物料

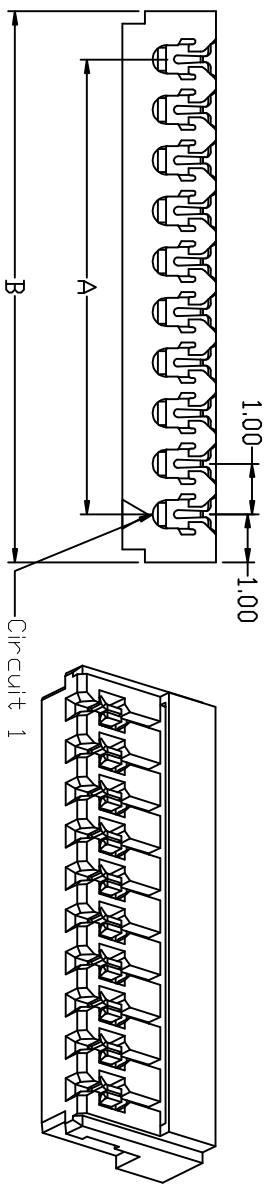

- Specifications(规格) :
 - Voltage rating(额定电压): 30V AC/DC
 - Current rating(额定电流): 0.5A AC/DC
 - Withstanding voltage(耐压值): 200V AC/minute
 - Temperature range(工作温度): -25°C~+85°C
 - Insulation resistance(绝缘电阻) ≥100MΩ
 - Contact resistance(接触电阻): ≤20mΩ
 - After environmental testing(环境测试后): ≤30mΩ
- Housing(胶壳)
 - Part No. (料号) J1001HC-XXP
 - Poles (PIN数): 02-14
 - Material (材质): Nylon 46 (尼龙46) UL 94V-0
 - Mates With HLB J1001 Series Wafer (匹配J1001系列针座)
 - Q'ty (数量): 1,000Pcs/Bag/每袋 (1,000Pcs)

PART NO.	Dimensions (mm)	
	A	B
J1001HC-02P	1.00	3.00
J1001HC-03P	2.00	4.00
J1001HC-04P	3.00	5.00
J1001HC-05P	4.00	6.00
J1001HC-06P	5.00	7.00
J1001HC-08P	7.00	9.00
J1001HC-09P	8.00	10.0
J1001HC-10P	9.00	11.0
J1001HC-11P	10.0	12.0
J1001HC-12P	11.0	13.0
J1001HC-13P	12.0	14.0
J1001HC-14P	13.0	15.0

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	批准 APPD	公差 GENERAL TOLERANCE . I ±0.3 . II ±0.2 . III ±0.1	角法 PROJECT	东莞市翰皓精密电子有限公司 Dongguan Hanhao Precision Electronics Co., Ltd			料号 PART NO	J1001HC-XXP			
2011/05/14	A	B	修改图框格式					批准 APPD	审核 CHK	绘图 DR	日期 DATA	品名 TITLE	1.00 mm Crimp Style connectors		
1	1							SUCCESS	24#		2007/05/03	单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV
												MM	1/1	A-003	B