

■ Specifications(规格) :

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 2A AC / DC
- Withstanding voltage(耐压值): 800V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ




■ Housing(胶壳)

- Part No. (料号) :J2011HR
- Poles (PIN数) : 02-16
- Material (材质) : Nylon 66 (尼龙66) UL 94V-0
- Suitable HLB J2011T Series Terminal(匹配2011T系列端子)
- Q' ty (数量) : 1,000Pcs/Bag/每袋 (1,000Pcs)

Poles	Part No	Dimensions (mm)	
		A	B
2	J2011HR-02P	2.00	5.35
3	J2011HR-03P	4.00	7.35
4	J2011HR-04P	6.00	9.35
5	J2011HR-05P	8.00	11.35
6	J2011HR-06P	10.00	13.35
7	J2011HR-07P	12.00	15.35
8	J2011HR-08P	14.00	17.35
9	J2011HR-09P	16.00	19.35
10	J2011HR-10P	18.00	21.35
11	J2011HR-11P	20.00	23.35
12	J2011HR-12P	22.00	25.35
13	J2011HR-13P	24.00	27.35
14	J2011HR-14P	26.00	29.35
15	J2011HR-15P	28.00	31.35
16	J2011HR-16P	30.00	33.35

							GENERAL TOLERANCE	东莞市翰皓精密电子有限公司				PART NO. J2011HR-XX			
							X ±0.30	Dongguan HanHao Precision Electronics Co.,Ltd				TITLE 2.0 mm Crimp Style Connectors			
							.XX ±0.20	APPROVAL Smark	CHECK Yu wei	DRAWN Liu Yan	DATA 2011/05/22				
							.XXX ±0.10					UNIT mm	SCALE 1:1	NUMBER 8	REV B
2011/05/22	A	B	/	Modify frame format	Jova	Jova Lau	PROJECT								
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT								



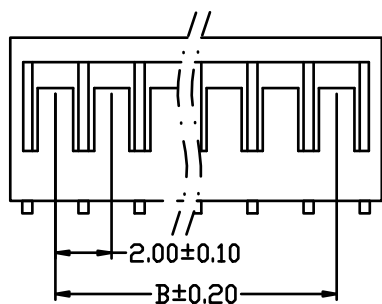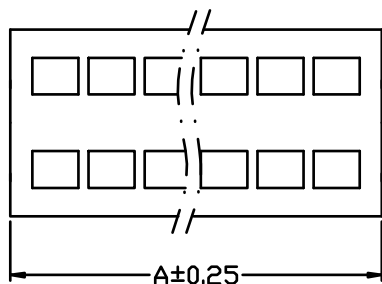

### Specifications




- Voltage Rating : 250V AC/DC
- Current Rating : 3A AC/DC
- Withstanding Voltage : 800V AC/Minute.
- Insulation Resistance : 1000MΩ Min.
- Temperature Range : - 25℃ to + 85℃
- Contact Resistance : 10mΩ Max.
- After environmental testing/20mΩ Max.

### Housing


- Part No. : J2011HV
- Poles : 02-16
- Material : Nylon 66 UL94V-0
- Q' ty : 1,000 Pcs/Bag

Poles	Part No.	Dimensions (mm)	
		A	B
02	J2011HV-02	2.00	5.30
03	J2011HV-03	4.00	7.30
04	J2011HV-04	6.00	9.30
05	J2011HV-05	8.00	11.30
06	J2011HV-06	10.00	13.30
07	J2011HV-07	12.00	15.30
08	J2011HV-08	14.00	17.30
09	J2011HV-09	16.00	19.30
10	J2011HV-10	18.00	21.30
11	J2011HV-11	20.00	23.30
12	J2011HV-12	22.00	25.30
13	J2011HV-13	24.00	27.30
14	J2011HV-14	26.00	29.30
15	J2011HV-15	28.00	31.30
16	J2011HV-16	30.00	33.30


							<b>GENERAL TOLERANCE</b> X ±0.30 JX ±0.20 JXX ±0.10				<b>东莞市翰皓精密电子有限公司</b> Dongguan HanHao Precision Electronics Co.,Ltd				<b>PART NO.</b> J2011HV-25X			
							<b>APPROVAL</b> Smark      Yu wei      Liu Yan      2011/06/22				<b>TITLE</b> 2.0 mm Crimp Style Connectors							
2011/05/22	A	B	/	Modify frame format	Jova	Jova Lau	PROJECT		UNIT		SCALE		NUMBER		REV			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT		UNIT		SCALE		NUMBER		REV			
1							PROJECT		UNIT		SCALE		NUMBER		REV			

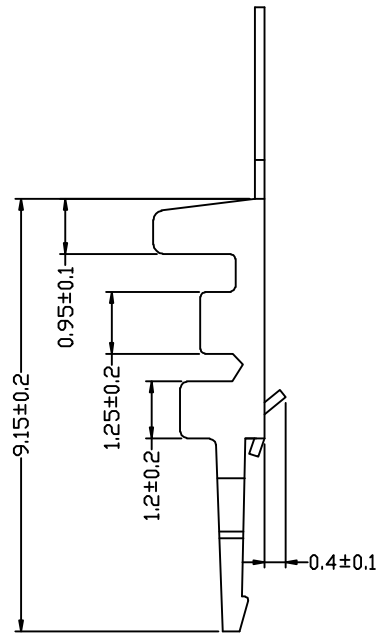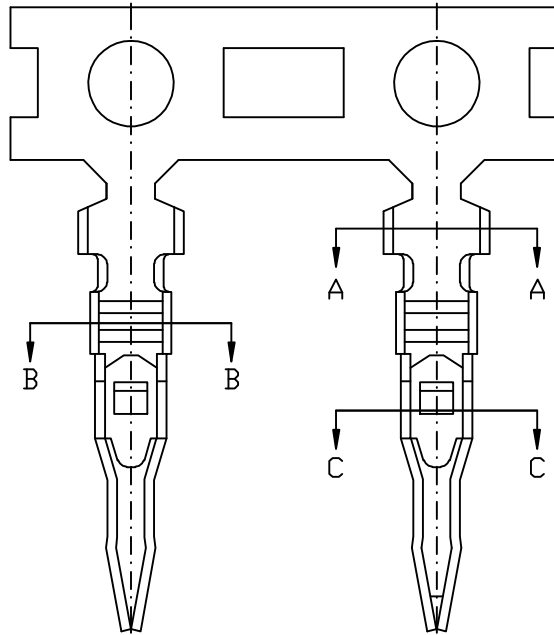

Section: A-A



Section: B-B



Section: C-C

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M  $\Omega$ min  
Temperature range: -25°C~+85°C  
(Including temperature rise in applying electrical current)
- Applicable PC board thickness: 0.063" (1.6mm)
- Contact resistance: Initial Value/ 20m $\Omega$ max  
After environmental testing/20m  $\Omega$ max

■ TERMINAL

- Part No.: J2011VT
- Material: Brass
- Finish: Tin plated
- Thickness: 0.2mm
- Applicable wires: AWG#24~30
- Q'ty: 10,000 pcs/roll

								<b>GENERAL TOLERANCE</b> X $\pm 0.30$ XX $\pm 0.20$ XXX $\pm 0.10$				<b>东莞市翰皓精密电子有限公司</b> Dongguan HanHao Precision Electronics Co.,Ltd				<b>PART NO.</b> J2011VT			
												<b>TITLE</b> 2.0 mm Crimp Style Connectors							
2011/05/22    A    B    /				Modify frame format    Jove    Jove Lau				<b>APPROVAL</b> <b>CHECK</b> <b>DRAWN</b> <b>DATA</b>				Smark    Yu wei    Liu Yan    2011/05/22							
<b>DATE</b>	<b>OLD REV</b>	<b>NEW REV</b>	<b>ECN</b>	<b>DESCRIPTION</b>	<b>CHECK</b>	<b>APPROVAL</b>	<b>PROJECT</b>	<b>UNIT</b>	<b>SCALE</b>	<b>NUMBER</b>	<b>REV</b>								
							☉	mm	1:1	8	B								