
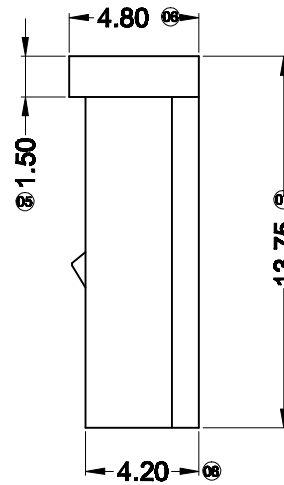
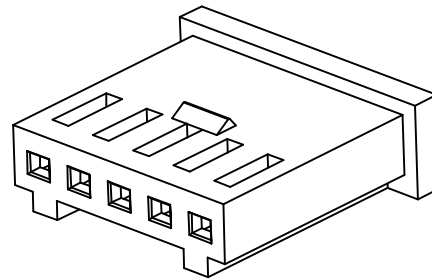
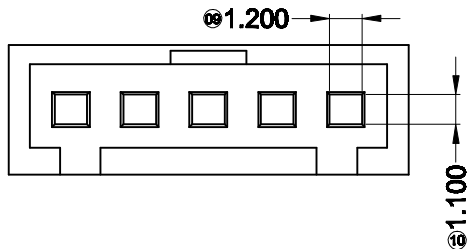
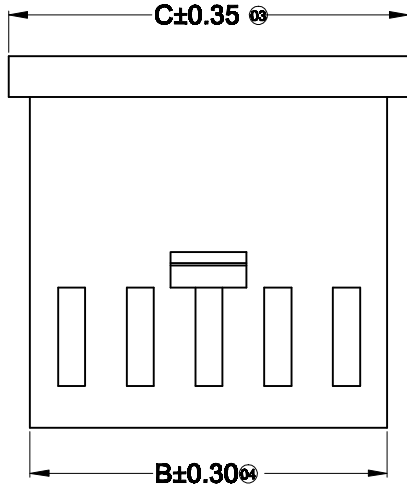


1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

F  
E  
D  
C  
B  
A

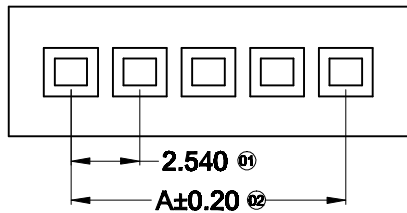

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

- ① Series No.A2549H
- ② Welding Board Angle : ordinary
- ③ Row No.-Pin No.: Single Row(02~22P)
- ④ Plug the Pin & special No.
- ⑤ Material: PA66 94V-0
- ⑥ Color: Natural Color

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.54	5.60	7.10	13	30.48	33.54	35.04
03	5.08	8.14	9.64	14	33.02	36.08	37.58
04	7.62	10.68	12.18	15	35.56	38.62	40.12
05	10.16	13.22	14.72	16	38.10	41.16	42.66
06	12.70	15.76	17.26	17	40.64	43.70	45.20
07	15.24	18.30	19.80	18	43.18	46.24	47.74
08	17.78	20.84	22.34	19	45.72	48.78	50.28
09	20.32	23.38	24.88	20	48.26	51.32	52.82
10	22.86	25.92	27.42	21	50.80	53.86	55.36
11	25.40	28.46	29.96	22	53.34	56.40	57.90
12	27.94	31.00	32.50				

A2549H-XX	PA66 UL 94V-0	A2549T	A2549W
PART NO	Material	Suitable HLB Terminal	Mates With HLB Wafer

2013/08/09		B	C	/	Modify drawing frame format	Luna	Jova Lau	<b>GENERAL TOLERANCE</b> X ±0.30 XX ±0.20 XXX ±0.10	东莞市翰皓精密电子有限公司 Dongguan Han-Hao Precision Electronics Co.,Ltd				PART NO. A2549H-XX			
2011/08/08		A	B		Modify drawing frame format	Luna	Jova Lau						APPROVAL CHECK DRAWN DATA	TITLE 2.54mm Crimp Style Connectors		
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	APPROVAL CHECK DRAWN DATA	UNIT MM	SCALE 1:1	NUMBER A-000	REV C				
1			2				PROJECT 									

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8